

PANEL PC 21" WIDE

RUGGED PANEL PC



PANEL PC 21,5" wide is a fanless touch screen panel dedicated to harsh environments.

The best low power consumption solution for embedded applications which need a high brightness screen and a high powerful computer in a same compact frame.

PANEL PC 21,5" wide runs with traditional operating systems as Win8 , Win7, WES8, WES7, WEC7, Linux Kernel 3.x, VxWorks 6.9.3.3, Android KitKat 4.4 (other distribution on demand).

PANEL 21,5" wide is compatible with night applications with a 0 to 100% dimmable brightness adjustment.

PANEL 21,5" wide is qualified according to environmental standards MIL-STD810F and MIL-STD461E.

- ◆ Rugged embedded Panel PC
- ◆ Intel Atom E3845 Quad Core 1.91 GHz
- ◆ 2 Intel GbE + 2 USB 3.0 + 1 RS232 + 1 RS485 + audio channel
- ◆ Extension slot for client applications with connectors I/O
- ◆ 21.5" Full HD screen, 1920 x 1080 pixels
- ◆ 0 to 100% dimmable
- ◆ Rugged connectors
- ◆ Low Consumption (50W)
- ◆ 5 wires resistive touch screen
- ◆ Climatic & vibration qualification : MIL STD 810F
- ◆ CEM qualification : MIL STD 461E

APPLICATIONS

- Navy
- Transport / Railway
- Power plants

SPECIFICATIONS*


General	
Enclosure	Aluminium
Processor	Intel Atom E3845 Quad Core 1.91 GHz
BIOS	AMI UEFI Bios at 64-Mbit
Memory	8Go DDR3L 1333 MHz
Hard disk drive	16 Go (Flash), up to 64 Go (on request) SSD hard disk drive (on request)
Extension slot	1 x Mini PCIexpress (1 x Full size). Other extension on request.
Ethernet	Intel i210 (Eth1 et Eth2) GbE 10/100/1000 Mbps
Ethernet compatibility	IEEE 802.3az
USB	Compatible 3.0 (480 MB/s), 500 mA per channel
Audio	Intel High Definition Audio Interface, Line In, Line Out and Mic In
Touch solution	5 wires resistive touch screen (driver installed)
External dimensions	550 (w) x 350 (h) x 100 (d) mm (without handles)
Fixations spacing dimensions	269 + 269 mm (w) and 169 + 169 mm (h)
Fixations	8 x M6 screws
Weight	8,9 kg (19.62 Lbs)
Battery	RTC battery 3V / 210 mAh
Power supply	DC: 12 Vdc – 36 Vdc, 50 W max AC: 90 Vac – 264 Vac, 50 W max
Power protection	Reverse polarity for DC voltage. Over voltage and over current Spikes
Operating systems	Win8 , Win7, WES8, WES7, WEC7, Linux Kernel 3.x, VxWorks 6.9.3.3, Android KitKat 4.4 (other distribution on demand)

Display	
Type	Sensitive LCD touch screen display
Screen size (Diagonal)	456,9mm (21,5")
Active Area	476,6 (w) x 268.1 mm (h)
Resolution	1920 x 1080 Full HD
Luminance	300 cd / m ²
Contrast ratio	5000 : 1 (Typical)
Max. color	16.7M
Viewing angle	89° (Up), 89° (Down), 89° (Right), 89° (Left)
backlight life	50 000 hours
Connectors	
Power supply (DC/AC)	DC: HE851-02E83AP50 AC: HE851-02E833P50
USB1	USBF TV21
USB2	USBF TV21
Ethernet 1	RJF TV21
Ethernet 2	RJF TV21
RS232/RS485 and audio	HE851-02E1419P50
User	HE851-02E1419S50
Environment	
Operating temperature	-20°C - ; +60°C with preheating
Storage temperature	-20°C ; +85°C
High temperature	MIL-STD-810F Method 501.4
Low temperature	MIL-STD-810F Method 502.4
Temperature shock	MIL-STD-810F Method 503.4
Humidity (storage)	95% -non-condensing, MIL-STD-810F Method 507.4
Vibration	MIL-STD-810F Method 514.5
Shock	MIL-STD-810F Method 516.5
Constant acceleration	MIL-STD-810F Method 513.5
Altitude	functional at 70 000 ft, MIL-STD-810F Method 500.4
Waterproof	Font panel IP65 compliant
CEM	MIL-STD-461E (CE101, CE102, RE101, RE102, CS101, CS114, CS115, RS101, RS103)
RoHS	RoHS2


ACCESSORIES	
Plug set (DC/AC versions)	
DC Power supply	DC: HE851-06EC83AS50 AC: HE851-06EC833S50
USB	2 x USBF TV6
Ethernet RJ45	2 x RJF TV6
RS232/RS485 and audio	HE851-06EC1419S50
User	HE851-06EC1419P50
Transport case	Robust water resistant polypropylene case, with pressure equalization valve

**Specifications given for 25°C*

INTEGRATION

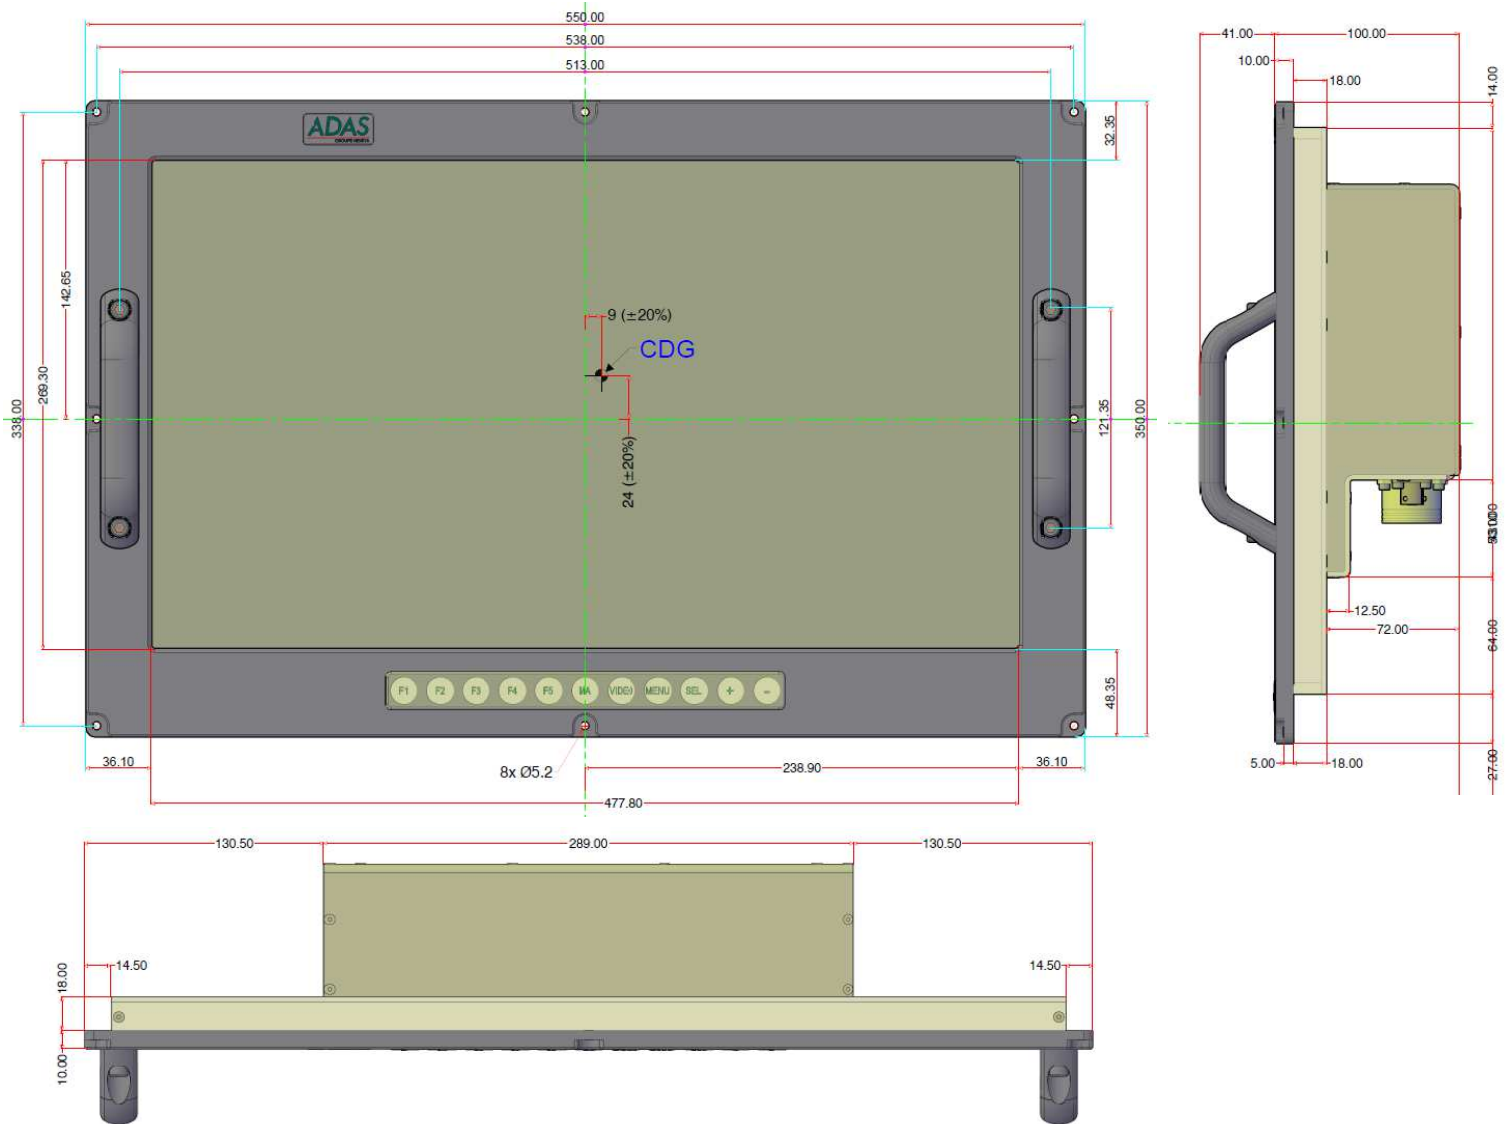

BOTTOM

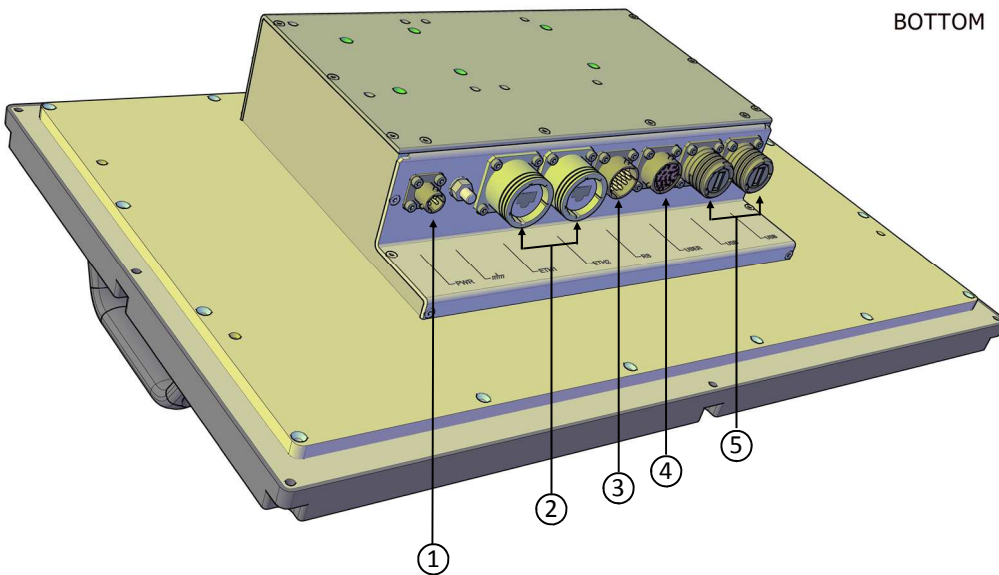

REMOTE CONNECTIONS

- Example:
1. Power
 2. Ethernet
 3. Serial
 4. User
 5. USB

ORDERING INFORMATION

PANEL-PC-21W/DC	Rugged panel PC 21,5" wide, with DC power supply
PANEL-PC-21W/AC	Rugged panel PC 21,5" wide, with AC power supply
PANEL-PC-21W-DC/PLUG	Plug set for DC power supply
PANEL-PC-21W-AC/PLUG	Plug set for AC power supply
SC-WIDE-TR-CASE	Transport case